




P180 General Tank Pump

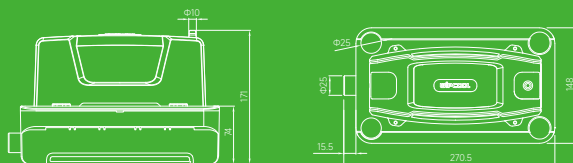

The general tank pump P180 can meet the most air conditioning and refrigeration equipment's condensate drainage, which covering discharge lift under 5/6meters. Suitable for the device which cooling capacity under 400,000 btu/hr.

Adopting a dirt resistant centrifugal high-power water pump, built-in safety switch and probe level sensor, make sure the pump can make the reliable running for a long time.

P180 General Tank Pump

Reliable Operation, Easy Maintenance



Floatless structure, free maintenance for long time working.



Automatic reset thermal protection, prolong service life.



Forced air cooling motor, ensure stable running.



Anti-backflow design, improve the safety drainage.



Max flow
280L/h(@50Hz)
350L/h(@60Hz)



Max rec. head
5m(@50Hz)
6m(@60Hz)



Tank capacity
1.8L

Technical Data

Model	P180	
Voltage	230V or 100-120V	
Discharge Head(Max.)	5m(17ft)@50Hz	6m(20ft)@60Hz
Flow Rate(Max.)	280L/h(74GPH)	350L/h(93GPH)
Tank Capacity	1.8L	
Sound Level at 1m	48dB(A)	
Ambient Temp.	0°C-50°C	
Power Consumption	60W	
Packing	Carton:6pcs	

Flow Rate

