




P580 Super Performance Tank Pump

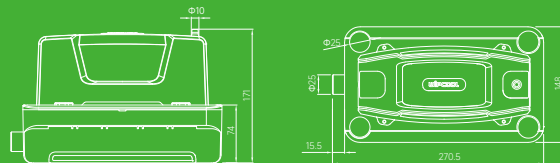

The P580 tank pump provides the most economical solution under extreme drainage conditions (12 meter lift height, 600L/h flow rate). Suitable for the device which cooling capacity under 500,000 btu/hr. Adopting brushless motor, dirt resistant high-power centrifugal water pump, built-in safety switch and dual control level sensor (probe & float). Ensuring that the product can operate reliable for a long time and safely discharge condensate.

P580 Super Performance Tank Pump

Ultra-high Lift, Big Flow Rate



Super performance (12m lift head, 580L/h flow rate)




Forced air cooling brushless motor, ensure stable running.



Anti-backflow design, guarantee the safety drainage.



Dual sensor control system, improve durability.

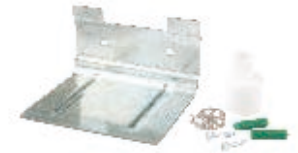

Max flow
580L/h



Max rec. head
12m



Tank capacity
1.8L

Technical Data :

Model	P580
Voltage	230V~/50-60Hz or 100-120V~/50-60Hz
Discharge Head(Max.)	12m(40ft)
Flow Rate(Max.)	580L/h(153GPH)
Tank Capacity	1.8L
Sound Level at 1m	60dB(A)
Ambient Temp.	0°C-50°C
Power Consumption	85W
Packing	Carton:6pcs

Flow Rate

