



MADE BY DSZH TOOL



MADE BY DSZH TOOL

Use For
R32

DIGITAL DISPLAY REFRIGERANT RECOVERY MACHINE



LIGHT WEIGHT FAST RECOVERY

ST-520D

Brushless DC Motor

Safe, sparkless design
Light weight, easy to carry

Digital Display

Easy and accurate reading of pressure values
Backlight for night use

Built-in Pressure Sensor

Accurate measurement of pressure values
Overpressure protection (38kg)

Double Cylinder Design


Quick recovery
Compact structure

Oilless Compressor

Suitable for R32, R600 and all other refrigerants

Purge

Prevent mixing of different refrigerants

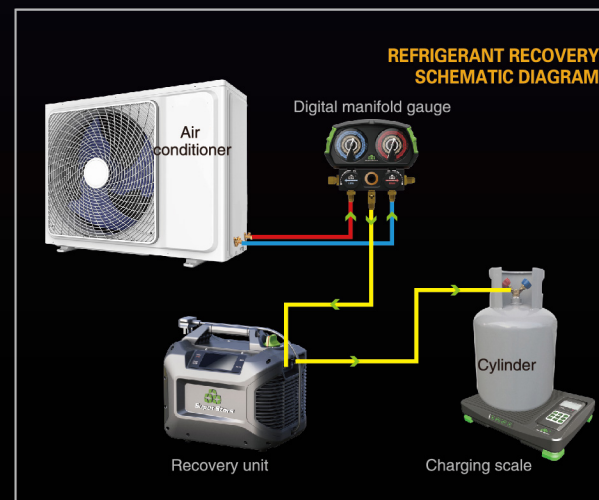

Item No.	ST-520D		
Suitable refrigerant gas	III series: R12, R134a, R401C, R406A, R500, 1234YF IV series: R22, R401A, R401B, R402B, R407C, R407D, R408A, R409A, R411A, R411B, R412A, R502, R509 V series: R402A, R404A, R407A, R407B, R410A, R507, R32		
Cylinder quantity	2 cylinder		
Power	220V-240V, 50/60Hz		
Motor	750W(1HP)		
Speed of revolution	2500 RPM		
Electric current	220V:6A		
Compressor	No oil lubricate, Forced air cooling, Piston type		
High pressure protection	38.5bar / 3850kPa(558psi)		
Operating temperature	0°C - 40°C / 32 - 104°F		
Dimensions	375 x 250 x 320 mm		
Net weight	10 kg		
Refrigerant gas	R134a	R22	R410A
Liquid	2.40 kg/min	2.70 kg/min	3.50 kg/min
Push-pull mode	7.50 kg/min	8.50 kg/min	9.50 kg/min

ROLLER TYPE TUBE CUTTER

ST-532



Item No.	Description	
ST-319	Roller Type Tube Cutter	For ϕ 1/8" to 3/4" (3-19mm)
ST-428		For ϕ 3/16" to 1-1/8" (4-28mm)
ST-532		For ϕ 3/16" to 1-1/4" (5-32mm)
ST-650		For ϕ 1/4" to 2" (6-50mm)
ST-670		For ϕ 1/4" to 2-3/4" (6-70mm)



ST-428

- ★ ALLOY STEEL BLADE: SHARP AND DURABLE
- ★ BALL BEARING: FLEXIBLE AND ACCURATE
- ★ ALUMINUM ALLOY CUTTER BODY: LIGHT AND LABOR-SAVING